


Vibration Mount Installation Guide

96-26040

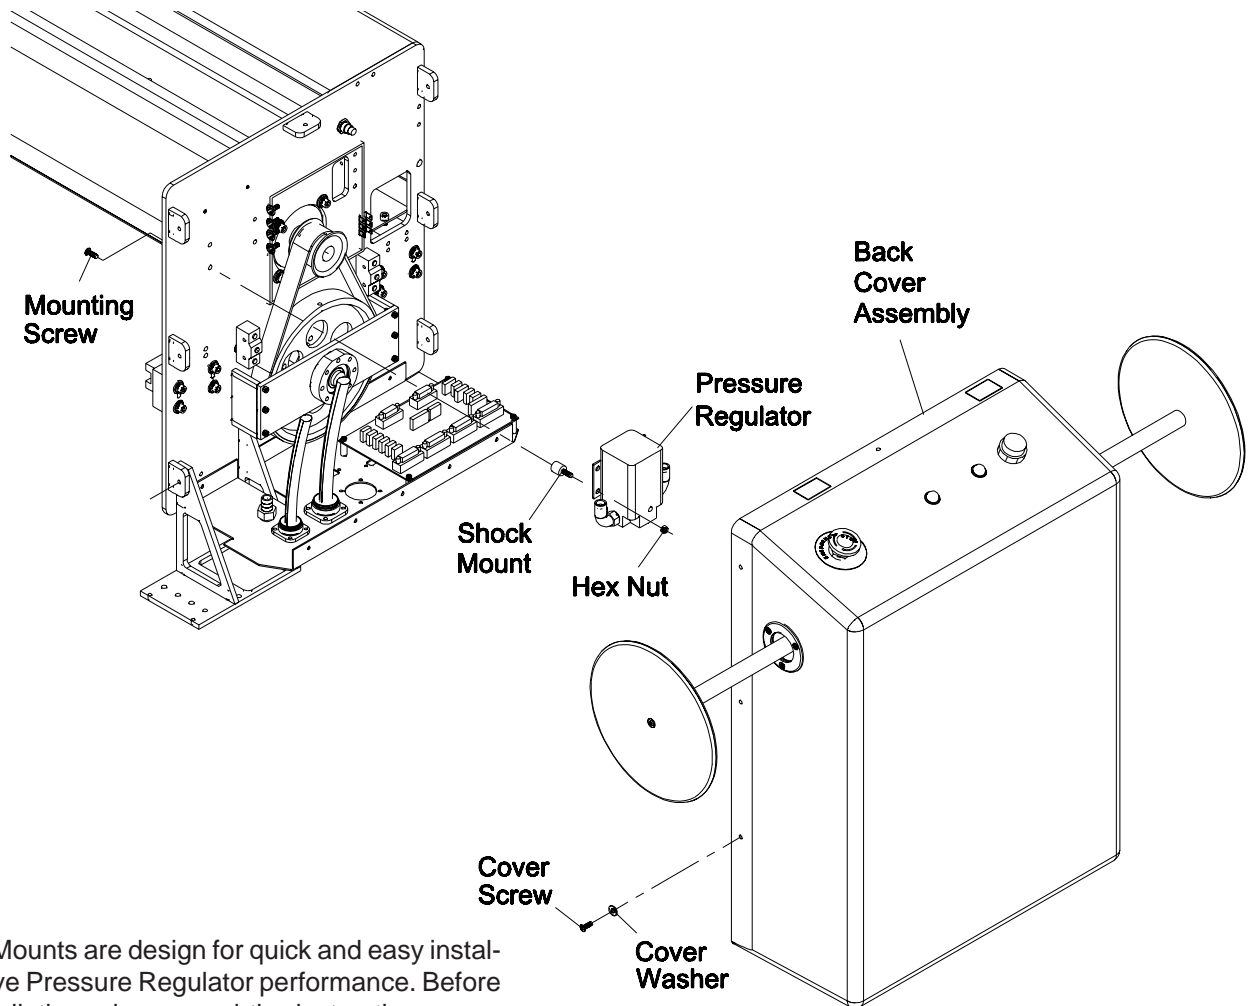

The Vibration Mounts are design for quick and easy installation to improve Pressure Regulator performance. Before you begin installation, please read the instructions carefully. Familiarize yourself with all the components.

Tools Required for installation:

- Allen Wrench Set
- 3/8" Wrench

Kit Components Required for installation:

- (4) Shock Mount, #65-26024
- (4) #8 Hex Nut, #211-93
- (4) Mounting Screw, #333-102-8S

Vibration Mount Installation



Warning

Disconnect power source before installation.

- 1) Disconnect the main power to the gantry.

- 2) Remove the screws and washers holding the back cover. Disconnect the wiring harness to the gantry. Remove the back cover.
- 3) Locate the Pressure Regulator on the back frame and remove the (4) mounting screws.
- 4) Install the (4) Stainless Steel Screws through the back frame as shown.
- 5) Install the (4) Shock Mounts to the back frame as shown.
- 6) Install the Pressure Regulator to the Mounts using the (4) Hex Nuts provided.
- 7) Install the back cover by connecting the wiring harness and securing the screws and washer.

Note: Your machine will not run with the back cover removed and the harness disconnected.